

# ISOLANTE ACR 026

## Unifying acrylic primer

### Description

INSULATION ACR 026 is a transparent acrylic insulator with a unifying effect.

### Characteristics


Mixture ratio	10:1
Application temperature	+10°C ÷ +25°C
Application	Spray
Coverage	70 - 80 g/m <sup>2</sup>
Dust dry	20'
Fingerprint dry	60'
Sanding	Do not Sand
Overcoating without sanding	2/4 h
Storage stability	1 year <sup>(1)</sup>
Packaging	25 L
Machine cleaning	DILUENTE DNE

1 in original sealed containers at temperatures between +10°C and +25°C

### How to use

ISOLANTE ACR 026 is a transparent acrylic insulator with unifying effect to be used as a first coat when varnishing with solventborne acrylic products.

### Label elements

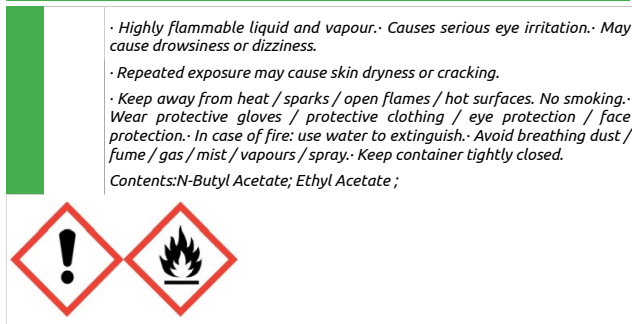

· Highly flammable liquid and vapour. · Causes serious eye irritation. · May cause drowsiness or dizziness.

· Repeated exposure may cause skin dryness or cracking.

· Keep away from heat / sparks / open flames / hot surfaces. No smoking. · Wear protective gloves / protective clothing / eye protection / face protection. · In case of fire: use water to extinguish. · Avoid breathing dust / fume / gas / mist / vapours / spray. · Keep container tightly closed.

Contents: N-Butyl Acetate; Ethyl Acetate ;

These information are given from the best of our knowledge and technical experience. They are of general character and not binding in any way our company. Every single case should be put to a practical test by the user who assumes the full responsibility of the final result of his work.